



## Stainless Steel Process Tank



- Capacity:** 600 Gallons/2271 Liters with 20% Head Space
- Power:** SEW-Eurodrive 1.5 HP Gearmotor, Single or Three Phase
- Agitation:** Standard Blade Bottom Agitation
- Heating:** Min. 900,000 BTU Hot Water or Steam Boiler is Required
- Jacket:** Dimple Plate, Bottom & Side Zone, Max. 70 PSI, Max. 50 GPM
- Ports:** (2) 1.5" TC Ports or (2) Thermowells for the Product and Indicating Thermometer, (2) 1.5" TC CIP Sprayballs Ports, (1) TC Inlet Port, and (2) Lifting Lugs
- Lid:** Flat Top with Center Bridge or Manway Cover
- Bottom:** Slight Pitch Toward Outlet
- Insulation:** Polyurethane
- Walls:** 304 Stainless Steel, No. 4 Finish (316 SS Available)
- Legs:** (4) Stainless Legs with Adjustable Ball Feet
- Outlet:** 2" Leak Detect Valve Ready
- Dimensions:** TBD

### PROCESS TANK LIST PRICE

**\$ 28,500.00**

#### Add-On Features :


316 Stainless Steel Interior-Extra Corrosion Protection for Product Contact Surface Area	\$	3,000.00
Cone or Dish Bottom Tank Design - <b>no additional charge</b>	\$	-
Side and Bottom Scrape Agitation	\$	2,500.00
Full Sweep Agitation	\$	2,200.00



**Full Sweep Agitation**



**Full Scrape Agitation**

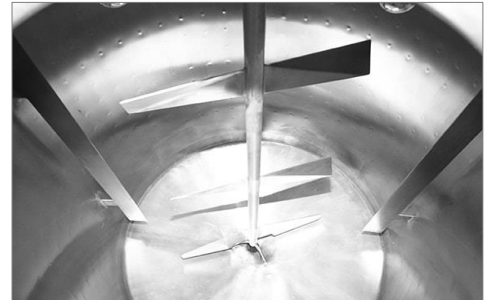

**Bottom, Middle & Top Blade Agitation**